



TrioDocs

Version: 0.4.0

Date: April 22, 2026

Download the latest version on:
<https://triodocs.org>

Apple Secrets

Apple Secrets

You already generated two of the six required secrets when you created your `GitHub` account.

Now it's time to collect the other four. Remember to save the secrets in your [Secrets Reference File](#) ↗

You need to save your information digitally, so you can copy and paste. The information is created in one place and used in another. Refer to [Configure Secrets](#) ↗ for how the `Secrets` are used. In addition to the 6 `Secrets`, other important information to keep handy (like usernames and passwords) is listed below. Be sure to keep this file secure.

Created / used at `developer.apple.com`

- Email address (this is your username)
- password
- Four items used as `Secrets`
 - `TEAMID`
 - `FASTLANE_ISSUER_ID`
 - `FASTLANE_KEY_ID`
 - `FASTLANE_KEY`

Created / used at `github.com`

- Email address
- password
- username
- If your username is `my-name` then:
 - Your `GitHub` address (URL) will be: `https://github.com/my-name`
 - Your (optional but recommended) `GitHub` organization address will be : `https://github.com/my-name-org`
 - Your Trio repository address will be: `https://github.com/my-name-org/Trio`
- One item used as a Secret
 - `GitHub` Personal Access Token (`GH_PAT`)

Create yourself

- a password - make one up and save it (`MATCH_PASSWORD`)

Collect the Four `Apple Secrets`

Section Summary (click to open/close)

You will be saving 4 `Secrets` from your *Apple* Account in this step.

1. Sign in to the [Apple Developer portal page](#).
2. If you need to accept a new agreement (happens at least twice a year), be sure to do so now
 - Scroll down to the Agreements section of your developer portal
3. The first *Apple Secret* is your Team ID.
 - Click on Membership Details on your developer portal
 - Copy the **Team ID** from this section. Record this as your `TEAMID`.
4. The final 3 *Apple Secrets* come from the creation of the "`FastLane API Key`".
 - Go to the [App Store Connect](#) interface, click the "Integrations" tab, and create a new key with "Admin" access. Give it the name: "`FastLane API Key`".
5. **Record three more secrets**
 - Record the issuer id; this will be used for `FASTLANE_ISSUER_ID`.
 - Record the key id; this will be used for `FASTLANE_KEY_ID`.
 - Download the `API Key` itself, and open it in a text editor. The contents of this file will be used for `FASTLANE_KEY`. Copy the full text, including the "`-----BEGIN PRIVATE KEY-----`" and "`-----END PRIVATE KEY-----`" lines.

This section provides detailed instructions for the four `Secrets` associated with your *Apple Developer* ID.

Name	Description
<code>TEAMID</code>	This 10-character identifier is associated with your <i>Apple Developer</i> ID and never changes
<code>FASTLANE_ISSUER_ID</code>	The issuer ID is associated with your <i>Apple Developer</i> ID and never changes
<code>FASTLANE_KEY_ID</code>	Key ID provided when you create an <code>API Key</code> in App Store Connect; it is associated with the <code>FASTLANE_KEY</code>
<code>FASTLANE_KEY</code>	Copy the full key from the text file you downloaded when generating the <code>API Key</code> - Filename has <code>FASTLANE_KEY_ID</code> value embedded in it. Include everything in the file from <code>-----BEGIN PRIVATE KEY-----</code> and ending in <code>-----END PRIVATE KEY-----</code>

New *Apple Developer* Account

▶▶ If you have an *Apple Developer* Account, skip ahead to [Find `TEAMID`](#).

If not, you need to purchase one (\$99 annual fee). It may take a few days for the account to be enabled.

- TrioDocs has an [Apple Developer Program ↗](#) page that explains in detail how to sign up for an account
- This link takes you straight to [Apple Developer account](#) to sign up

Find `TEAMID`

Sign in to your *Apple Developer* account at this link: [Apple Developer portal page](#).

If you need graphics for this part - use [LoopDocs](#) for reference. The secrets are all the same for all OS-AID apps.

1. Click `Account` in the top menu bar
2. If you need to accept a new agreement (at least twice a year), be sure to do so now
3. Click the `Membership Details` icon
4. Next to the `Team ID` field, is a 10-character ID number.

Record this for use as `TEAMID` in your `Secrets` file. You will also need it when you [Create App Group ↗](#).

- Stop a moment and double-check
- If you get this wrong, you will have errors at the very end, which require you to delete some items and repeat some steps on this page

Do not "type" what you think you see

Copy and paste the `Team ID` from the webpage.

- `TEAMID` must be 10 characters
- Avoid typing an `8` when it should be a `B`

Generate `API Key`

If you need graphics for this part - use [LoopDocs](#) for reference. The secrets are all the same for all OS-AID apps.

This step is used to create and save the final 3 `Secrets` you need from your *Apple Developer* account.

Paid Apple Developer Account is Required

To generate the `API Key`, you must have a paid *Apple Developer* account.

Click this link to open in a new tab: [App Store Connect/Access/Integrations/API](#)

- Click the `Integrations` tab

If this is your first time here, you will see:

- "Permission is required to access the App Store Connect API. You can request access on behalf of your organization."
- Click on `Request Access` and follow directions until access is granted

The numbered steps below correspond to the actions you take in the subsequent windows:

1. Click on the `Generate API Key` button or the blue + sign to open the `Generate API Key` dialog box
2. Enter the name of the key as "`FastLane API Key`"
3. Choose `Admin` in the access dropdown menu
4. Confirm the name and that "`Admin`" is selected and then click on the "`Generate`" button

Copy API Key Secrets

The `Integrations` screen appears again with content similar to the graphic below; the key information is blanked out for security.

Review the graphic and then follow the directions below to save more parameters you will need to configure `Secrets`.

Generating an API key allows you to configure, authenticate, and use one or more Apple services for that key. Keys don't expire, but can't be modified to access more services once created. You can have a maximum of 50 active keys at a time. [Learn More](#)

Issuer ID ?
[Redacted] [Copy](#)

Active (1) + [Edit](#)

NAME	GENERATED BY	KEY ID	LAST USED ^	ACCESS
FastLane API Key	[Redacted]	[Redacted] Copy Key ID		Admin Download API Key


1. A button labeled `Copy` is always adjacent to the `Issuer ID` above the word `Active` (this is the same for all keys that you generate with this `Apple Developer ID`)
 - Tap on the `Copy` button - this copies the `Issuer ID` into your paste buffer
 - In the file where you are saving information, paste this with the indication that it is for `FASTLANE_ISSUER_ID`
2. Hover to the right of the `Key ID` and the `Copy Key ID` button shows up
 - Tap on the `Copy Key ID` button - this copies the `Key ID` into your paste buffer
 - In the file where you are saving information, paste this with the indication that it is for `FASTLANE_KEY_ID`
3. Click on the `Download API Key` button - you will be warned you can only download this once.
4. Find your `AuthKey` download in your downloads folder. The name of the file will be "`AuthKey_KeyID.p8`" where `KeyID` matches your `FASTLANE_KEY_ID`

The next task is to rename the file so you can open it. Highlight the filename and choose `rename`, then add `.txt` after `.p8`. In other words, modify `AuthKey_AAAAAAAAAA.p8` to `AuthKey_AAAAAAAAAA.p8.txt` and click on `Use`

.txt when questioned.

5. Double-click to open the `AuthKey_AAAAAAAAAA.p8.txt` file. It will look similar to the screenshot below. You need to highlight **ALL OF THE CONTENTS** of that file and copy it and then paste it into your Secrets Reference file as the `FASTLANE_KEY`.

- **Click inside that file**
- Highlight **all** the text, including the `"-----BEGIN PRIVATE KEY-----"` and `"-----END PRIVATE KEY-----"` lines and then
- Copy **all** of the text to the clipboard (Cf. screenshot below).
 - On a **Mac**, use `⌘ Cmd + A`, then `⌘ Cmd + C` to copy all the contents
 - On a **PC**, use `^ Ctrl + A`, then `^ Ctrl + C` to copy all the contents
- In the file where you are saving information, paste this with the indication that it is for `FASTLANE_KEY`

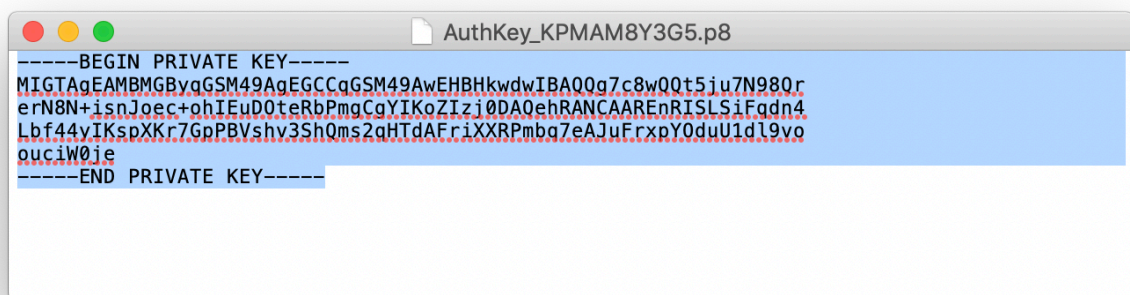

Organize your Key File

Pro Tip: Use the same folder as your Secrets Reference File

It's a good idea to keep all your important files in one place. You probably set up a folder for your [Secrets Reference File](#). Use the same folder for your [API key](#) - be sure to label the file so you know what the key is. For example, change the name from `KPMAM8y3G5.p8` to `API_KEY_KPMAM8y3G5.p8`.

Do Not Confuse Your Keys

API Key vs APN Key

If you use Remote Commands with [Nightscout](#) or [Trio](#), you may notice the Application Programming Interface (API) key has the same type of format as the *Apple* Push Notification (APN) key. The keys for both of these purposes are p8 keys, but they should not be confused with each other.

The `Secrets` for building with [GitHub](#) use the `API Key`.

The config vars for `Nightscout`, `Trio` and `Loop` use the `APN Key`.

Done with *Apple* Secrets

In summary, from this section, you have found or generated the following and saved copies for later use

- TEAMID
.....
- FASTLANE_ISSUER_ID
.....
- FASTLANE_KEY_ID
.....
- FASTLANE_KEY
.....

Time for a Break?

This is a good place to pause if you need to. Just note where you are on the page so you can return later.

Navigation: ← [Back to Create a GitHub Account](#) | [Next: Fork and Prepare](#) →